
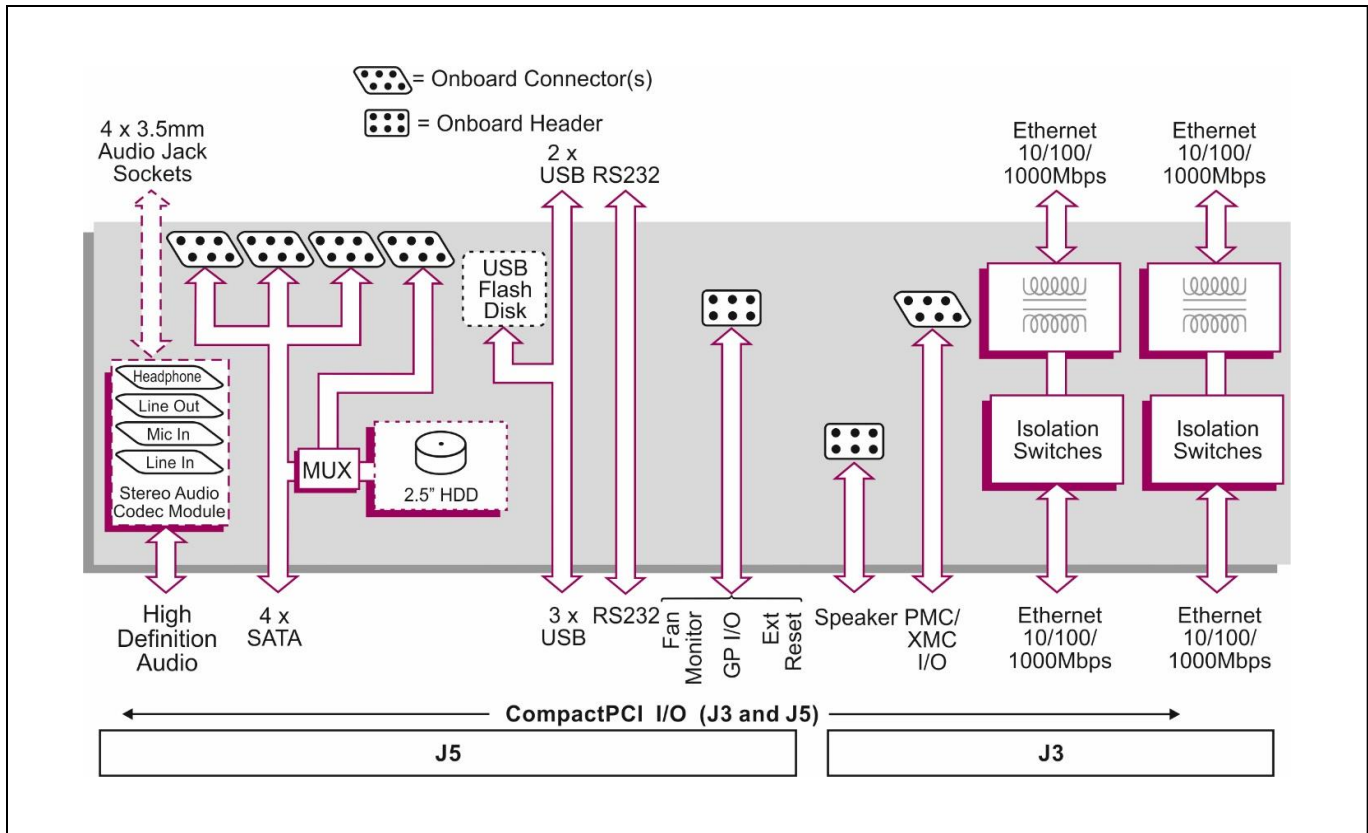


Rear Transition Module

Key Features

The AD PP5/010 is designed to be used with the Concurrent Technologies PP 81x/09x CompactPCI® Processor board family. The Transition Module mounts in the rear transition area of the CompactPCI backplane and provides straightforward access to the majority of the I/O functions provided on the processor board. Many I/O interfaces are accessed through the Transition Module's own front panel and the remainder from headers mounted on the Module.

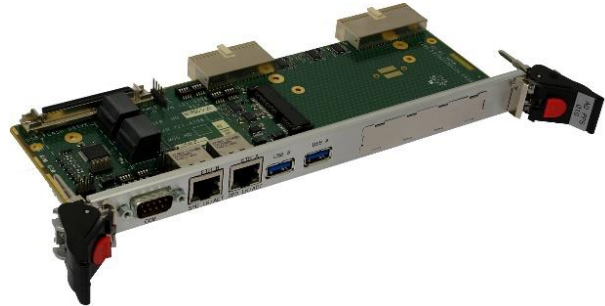

Ethernet Interfaces

- two Gigabit Ethernet channels
- supports 10BASE-T, 100BASE-Tx and 1000BASE-T for UTP CAT5 via RJ45 connectors on front
- Ethernet signals are routed via transition module's front panel or via PICMG® 2.16

Serial ATA

- 4 x SATA interfaces:
 - 3 via on-board SATA connectors
 - 1 via on-board SATA connector or supporting optional on-board HDD
 - transfer rates up to 300 Mbytes/s

Serial Interface

- 1 x RS232 serial port:
 - via front panel 9-way D-type
 - supports TXD, RXD, RTS, CTS, DTR, DSR and DCD and RI

USB Interface

- 3 x USB channels:
 - 2 channels accessed via USB connectors on
 - 1 supporting optional on-board Flash disk USB Interface

PMC/XMC I/O

- vertical on-board 68-way high density D-type connector
- connector provides 64 bits of I/O from PMC/XMC site 2 Pn4

Stereo Audio Interface

- optional daughter board with audio CoDec supporting:
 - stereo line in
 - stereo microphone in
 - stereo line out
 - stereo headphones out
- accessed via four 3.5mm jack sockets on front panel
- 2.5" HDD not supported with audio option

Other Interfaces

- 10-way on-board header providing:
 - system fan monitor
 - external reset
 - general purpose user I/O lines (GP I/O)
- 5-way on-board header providing:
 - legacy speaker

Electrical Specification

- all voltages to be within +5%/-3%
- +5V @ 0.5A (typical) 1.1A (max)
- +3.3V @ 0.8A (typical) 1.5A (max)
- current taken via host board

Environmental Specification

- operating temperatures:
 - 0°C to +55°C (N-Series)
- non-operating: -40°C to +85°C
- 5% to 95% Relative Humidity, non-condensing

Mechanical Specification

- 6U form-factor: 9.2" x 3.2" (233.35mm x 80mm)
- single-slot: 0.8" (20.3mm)
- connectors: IEC-1076-4-101 for J3 and J5
- shock:
 - 20g, 11ms, ½ sine (operating);
- vibration:
 - 5Hz-2000 Hz at 2g, 0.38mm peak displacement (operating)



Parhelia B.V.
www.parheliabv.com
☎ +31(0)10 741 00 28