
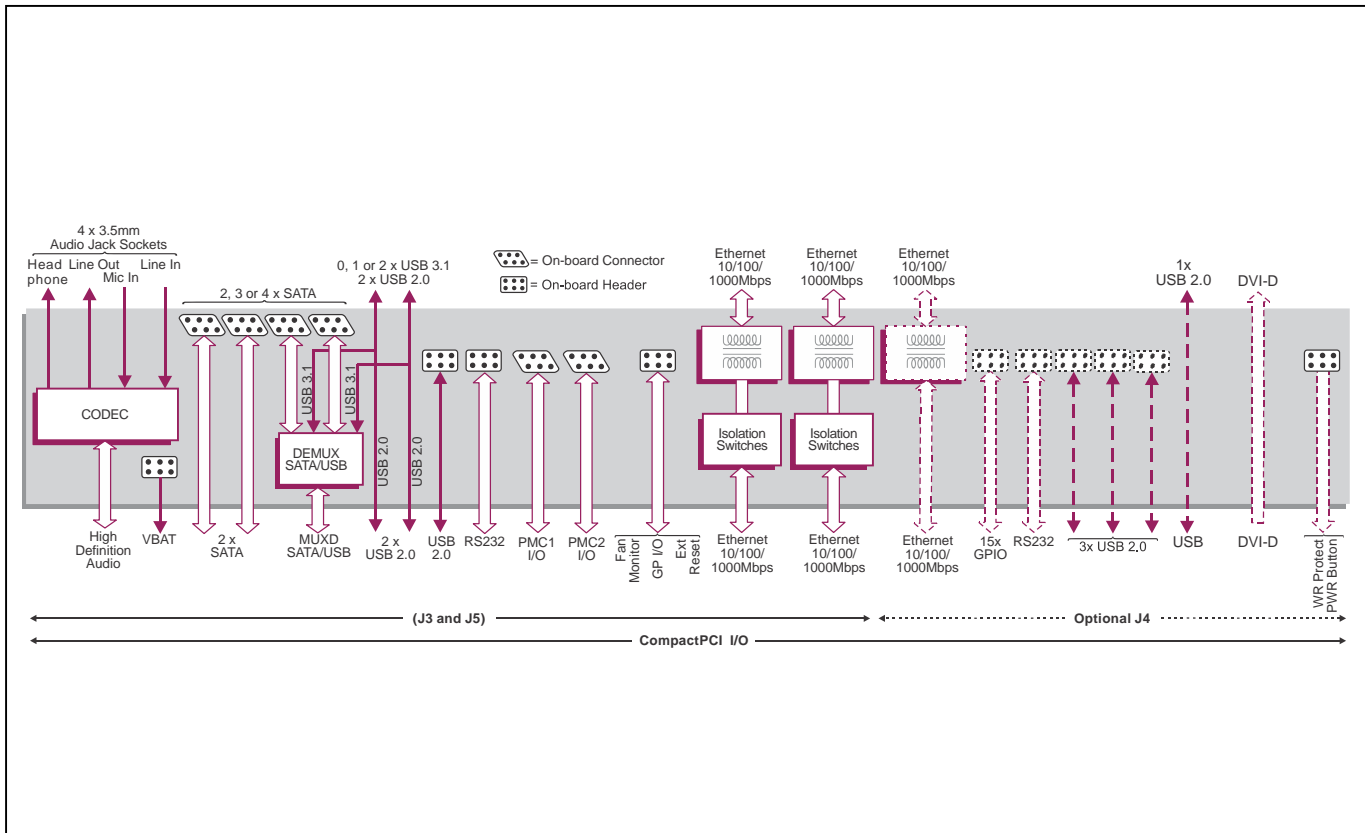


Rear Transition Module

Key Features

AD PP5/013 is a Rear Transition Module (RTM) and is designed to support Concurrent Technologies' 6U CompactPCI® PP B7x/msd board.

- 6U CompactPCI Rear Transition Module
- Compatible with PP B7x/msd processor board
- Panel connectors for Ethernet, USB, DVI-D and audio
- On board connectors for SATA and PMC I/O
- On board headers for USB, Serial, GPIO and other functions

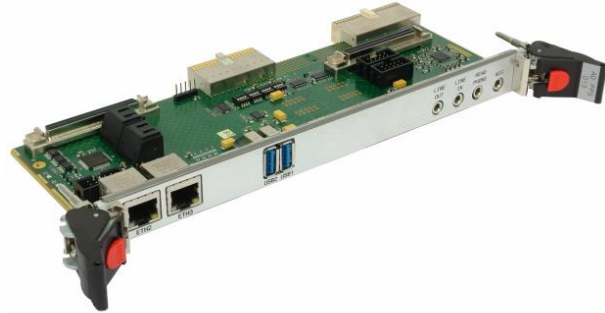

Electrical Specification

- all voltages to be within +5%/-3%
- typical current figures:
 - +5V @ 0.1A
 - +3.3V @ 0.6A
- current taken via host board

Environmental Specification

- operating temperatures:
 - 0°C to +55°C (N-Series)
 - -25°C to +70°C (E-Series)
 - -40°C to +85°C (K-Series)
- non-operating: -40°C to +85°C
- 5% to 95% Relative Humidity, non-condensing

Mechanical Specification

- 6U form-factor: 9.2" x 3.2" (233.35mm x 80mm)
- single-slot: 0.8" (20.3mm)
- connectors: IEC-1076-4-101 for J3, J4 and J5:
 - J4 is optional
- shock:
 - 20g, 11ms, ½ sine (operating);
- vibration:
 - 5Hz-2000 Hz at 2g, 0.38mm peak displacement (operating)

Further Information

- For further information refer to the board's Technical Reference Manual



Parhelia B.V.
www.parheliabv.com
☎ +31(0)10 741 00 28