

SPC-3150



15" Stainless Steel Panel PC, Intel® Celeron® J1900 Processor, Food-grade SUS 304



Features

- Intel® Celeron® J1900 (2.0 GHz)
- 15" industrial LCD panel and touch
- M12 I/O Connectors
- Food-grade SUS304 stainless steel housing
- Fanless and IP65 Protection
- -10~50°C Wide temperature operating
- Optional 9~36VDC input
- Optional WiFi, Bluetooth, 4G, 5G



Specifications

System

CPU	Intel® Quad-Core™ Celeron® J1900 (2.0GHz)
Memory	1 x SO-DIMM DDR3L-1333/1600 (up to 8GB)
Storage	1 x Full-size Mini-PCle for mSATA SSD
Operating System	Windows 7/10, Linux

Display

Size	15-inch
Resolution	1024 x 768
Brightness	300 cd/m ²
Contrast Ratio	600:1
LED Lifetime	30000 hrs

Touch Screen

Type	Industrial five-wire resistive touch
------	--------------------------------------

I/O Connectors

Serial Port	1 x RS-232, 1 x RS-232/485
USB Port	4 x USB2.0
Ethernet	2 x GbE LAN
Power	1 x DC-in
Others	1 x ATX Switch

Expansion

Mini-PCle	1 x Full-size Mini-PCle for mSATA 1 x Full-size Mini-PCle
-----------	--

Power Management

Power Input	DC 12V
Consumption	23W(Typ.)

Environmental

Operating Temperature	-10~50°C
Storage Temperature	-20~60°C
Relative Humidity	5%-90%,@ 40°C (non-condensing)
IP Protection	IP65


Mechanical

Material	SUS 304
Mounting Mode	VESA-mount
Dimension (W x L x H)	406 x 330 x 51 mm
Weight	5.7Kg

Packing List

- 1 x SPC-3150
- Power Adapter and Cord
- Interface conversion cord
- 1 x Certificate
- 1 x Warranty Card

Dimensions

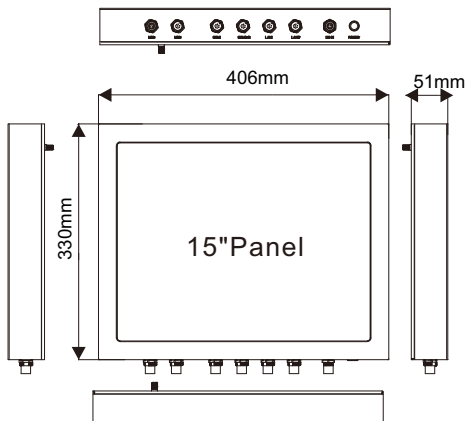

- | | |
|-----------------|-----------|
| A: Power Switch | E: COM2/3 |
| B: DC-IN | F: COM1 |
| C: LAN2 | G: USB |
| D: LAN1 | H: USB |