

12.1" IP66 Stainless Steel Panel PC with Intel® Celeron® J6412 Processor

Overview




The 12.1-inch SPC-9120 stainless steel panel PC, powered by Intel® Celeron® J6412 processor, is specifically designed for the food processing and pharmaceutical industries. Its housing is constructed from SUS 304/316 stainless steel with a seamless design, making it easy to clean and highly durable. The SPC-9120 is compact and equipped with M12 I/O ports, meeting IP66 dust and waterproof standards, making it ideal for dusty, humid, or harsh environments.

Features

- Intel® Celeron® J6412 processor
- 12.1" stainless steel panel PC with capacitive or resistive touchscreen
- Seamless stainless steel SUS304/316 housing
- M12 I/O connectors
- -10 to 50°C wide operating temperature range
- Fanless and IP66 protection
- 9 to 36VDC input



I/O Interfaces

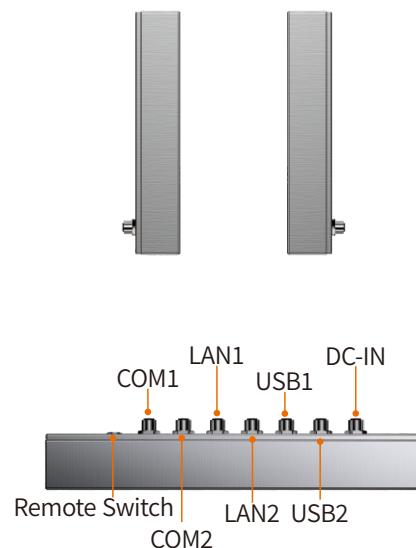

Specifications

Display	
Size	12.1 inch
Touch Type	Projected capacitive multi touch 5-wire resistive touch
Transmittance	87% (capacitive) / 80% (resistive)
Control Interface	USB
Surface Hardness	≥7H for capacitive, ≥3H for resistive
Resolution	1024 x 768
Luminance	450 nits
Contrast Ratio	1000: 1
View Angles	89 (left), 89 (right), 89 (up), 89 (down)
LED Lifetime	50,000 hrs
Color	16.7M
System	
CPU	Intel® Celeron® J6412 (2.0 GHz) processor
Memory	1 x SO-DIMM DDR4-3200MHz, up to 16GB
Storage	1 x 2.5" SATA HDD/SSD (optional) 1 x full length Mini PCIe for mSATA SSD
I/O Ports	
USB	4 x USB2.0
Serial	2 x COM (Supports 2x RS232 or 1x RS232 and 1 x RS485)
Ethernet	2 x GbE LAN
RF Communication	
Wi-Fi	Wi-Fi 802.11 a/b/g/n/ac (Optional)
Bluetooth	BT4.0 (Optional)
Power	
Button	Yes
DC Input	9 to 36VDC
Power Consumption	18W
Power Mode	ATX
Operating System	
Windows	Windows 10, Windows 11
Mechanical	
Dimensions (W x D x H)	320 x 253.5 x 47 mm (12.6 x 9.98 x 1.85 inches)
Weight (N.W.)	3.3 kg (7.28 lbs)
Mounting	VESA 100
Material	Stainless steel SUS 304 or 316 (optional)
Environment	
Operating Temperature	-10°C to 50°C 14°F to 122°F) -20°C to 60°C (-4°F to 140°F)(with W.T. SSD/DRAM)
Storage Temperature	-40 to 80°C (-40 to 176°F)
Relative Humidity	5~90%, non-condensing
IP Rating	IP66 compliant
Packing List	
Packing List	1 x SPC-9120 2 x M12 to RJ45 Ethernet cable 2 x M12 to USB cable 2 x M12 to DB9 cable 1 x AC-DC power adapter 1 x AC power cord

Dimensions

