


Features

Performance for Industrial IoT Applications

- 48 Digital I/O (also referred to as GPIO)
- Each line is configurable for input, output, or output with readback
- Level converters provide support up to 30 Volts DC
- Current: 12 mA sink, 5 mA source
- Each line supports programmable event sensing
- Programmable interrupts
- Supports Windows and Linux x86/ARM drivers
- Lattice Semiconductor Corp., MachXO2™ FPGA
- Single Serial Peripheral Interface (SPI) with activity LED

Rugged Design for Demanding Environments

- -40°C to +85°C Operating Temperature Range
- Shock and vibration tested

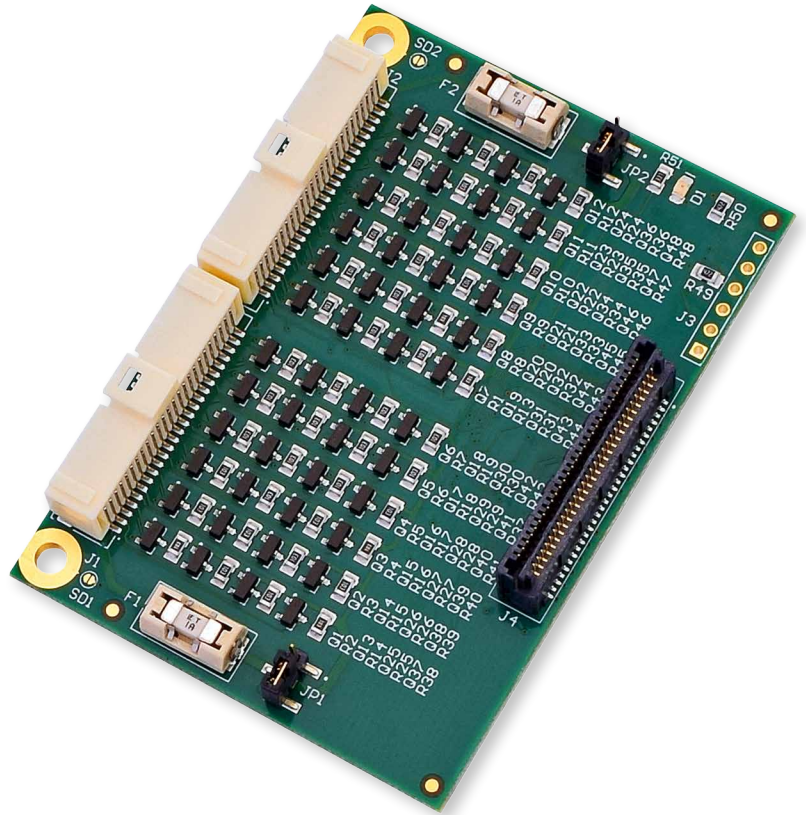

Product Description


WinSystems' IO60-DIO48 Module adds General Purpose I/O (GPIO) to embedded systems with IO60 expansion featuring 48 Digital I/O lines tolerant to 30 V DC. The SPI interface is implemented through the MACH XO2 SPI-slave EFB (Embedded Function Block) interface. Each bit of each port is implemented as a bi-directional tristate driver. Each bit of each port can also be configured and enabled to detect rising and/or falling edge events and generate a system interrupt.

WinSystems can provide custom configurations for OEM clients. Please contact a Applications Engineer through our contact page for details.



Parhelia B.V.
www.parhelia-bv.com
+31(0)10 741 00 28

Connectors

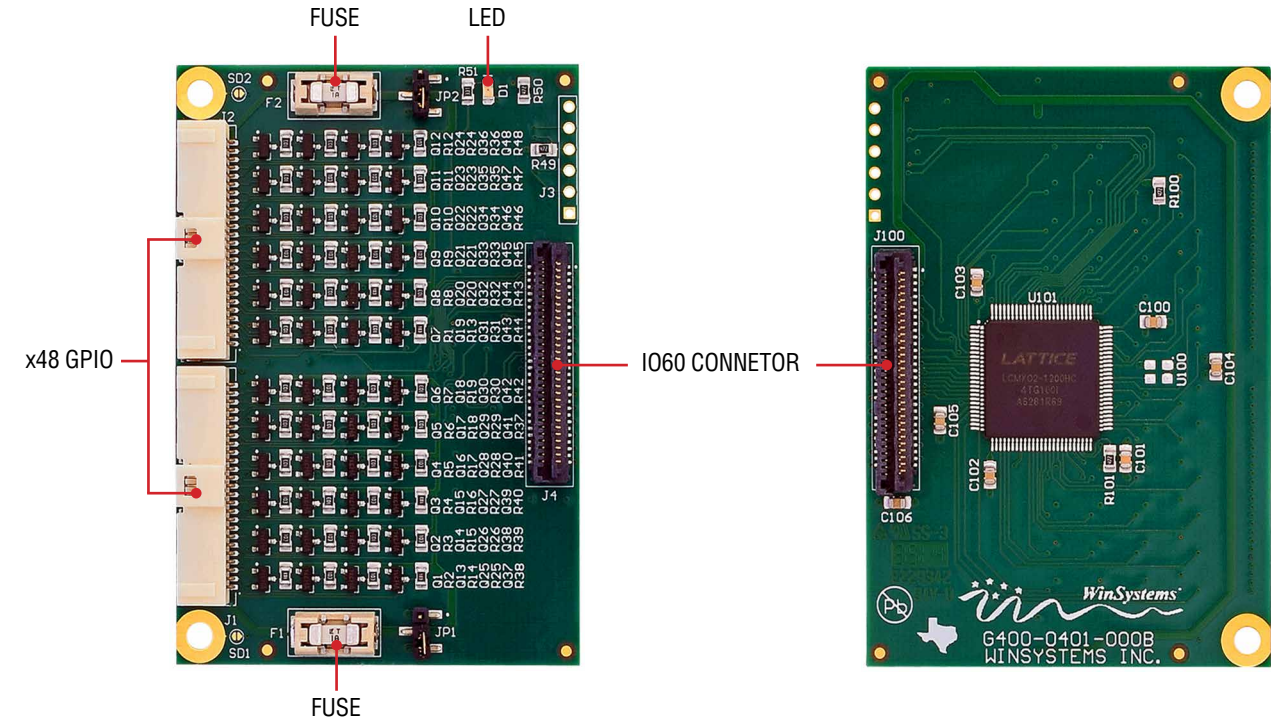

Technical Specifications

ELECTRICAL	<ul style="list-style-type: none">Digital I/O: 3 V to 30 VDCVcc: 3.3 V, 250 mA typicalCurrent: 12 mA sink, 5 mA source per line
MECHANICAL	<ul style="list-style-type: none">Dimensions: 2.83 in L x 1.97 in W (72 mm L x 50 mm W)Weight: 1.0 oz (29 gm)PCB Thickness: 0.078 inch (1.98 mm)
ENVIRONMENTAL	<ul style="list-style-type: none">Operational Temp Range: -40 °C to +85 °CHumidity (RH): 5% to 95% non-condensingRandom Shock Testing: MIL-STD-202G, Method 213B, Condition A, 50g half-sine, 11ms duration per axis, 3 axisRandom Vibration Testing: MIL-STD-202G, Method 214A, Condition D, 01g/Hz (11.95g rms), 20 minutes per axis, 3 axisRoHS Compliant: Yes
OS SUPPORT	<ul style="list-style-type: none">Windows and Linux (Drivers and sample code are available for single board computers featuring IO60 expansion.)

Order Information

PART NUMBER	IO60-DIO48
ACCESSORIES	<ul style="list-style-type: none">KIT-IO60-STANDOFF-2 – Standoff kit (included). Contains following items:<ul style="list-style-type: none">Standoff: x2 Aluminum, 5 mm HEX, 12 mm Long, 3.5 mm THREAD, Male/FemaleNex Nut: x2 Zinc Finish, M3-0.5 DINScrew: x2 Stainless Steel, M3 x 0.5 mm x 6 mm PPH

Expansion and Customization Options

WinSystems provides additional cables, expansion cards, power supplies, and solid state drives to complete your embedded computing solution including data acquisition, communications, location, and other features via PCIe/104 and M.2 interfaces. Our Application Engineers are available to guide you through product selection and customized options.

Contact an Application Engineer or visit our website for more information.



Parhelia B.V.
www.parhelia-bv.com
+31(0)10 741 00 28



WinSystems, Inc. | 715 Stadium Drive, Arlington, Texas 76011 | 817-274-7553 | info@winsystems.com | www.winsystems.com