

Features

Compact LCD Panel

- 6.5-inch TN LCD panel
- Brightness up to 700 nits (cd/m2)
- 640 x 480 resolution

Performance for Industrial IoT Applications

- Intel® Atom™ E3800 PC/104-Plus Processor
- Up to 4 GB Soldered Down DDR3L System RAM
- Time Coordinated Computing
- Precision Time Measurement

Rugged Design for Demanding Environments

- -30°C to +85°C Operating Temperature Range
- PC/104-Plus Small Form Factor
- Shock and Vibration Tested

Fast Graphics at High Resolutions

- Intel® Gen7 Graphics Engine
- Multiple Displays Supported
- Full-HD and 3D Graphics Acceleration

Secure and Trusted Data

- Intel Security Engine
- Cryptographic Acceleration

Connectivity and I/O for Embedded Systems

- Ethernet
- 3x USB 2.0
- 24 GPIO with Event Sense
- Four Serial Ports

Expansion Options

- PC/104-Plus (PC/104 and PCI-104)
- MiniPCIe/mSATA Socket



Parhelia B.V.
www.parhelia-bv.com
☎ +31(0)10 741 00 28

Product Description

The PPC3-6.5-407 from WINSYSTEMS utilizes the E3800 family of Atom™ processors from Intel® to provide low power and high performance in a compact 6.5-inch Panel PC. Designed for harsh environments and reliability, the design includes a sunlight readable display and soldered RAM for added shock and vibration resistance with operating temperature ranges available from -30°C to +85°C.


WINSYSTEMS is offering the PPC3-6.5-407 in multi-core options to fit a variety of application requirements. Scalable performance allows choices between single, dual or quad-core processing. Each processor option is available with 2G or 4G of soldered DDR3 memory and optional stack-through PC/104-Plus connectors.

This industrial Panel PC is a full-featured embedded system with a variety of onboard I/O options. Two additional display interfaces (MiniDisplayPort, and VGA) allow support for concurrent video output with the LVDS interface to the LCD panel, along with stereo audio. Communication interfaces include Gigabit Ethernet, three USB 2.0 ports, two serial RS-232/422/485 channels and two serial RS-232 channels. 24 digital I/O lines with event sense can be programmed individually for input, output or interrupt driven applications. For additional flexibility, the I/O lines can be paired with external isolation and relay modules.


Linux, Windows and other x86 operating systems can be booted from the SATA, mSATA, or USB interfaces, providing flexible data storage options.

Drivers are available from the WINSYSTEMS website.

Block Diagram

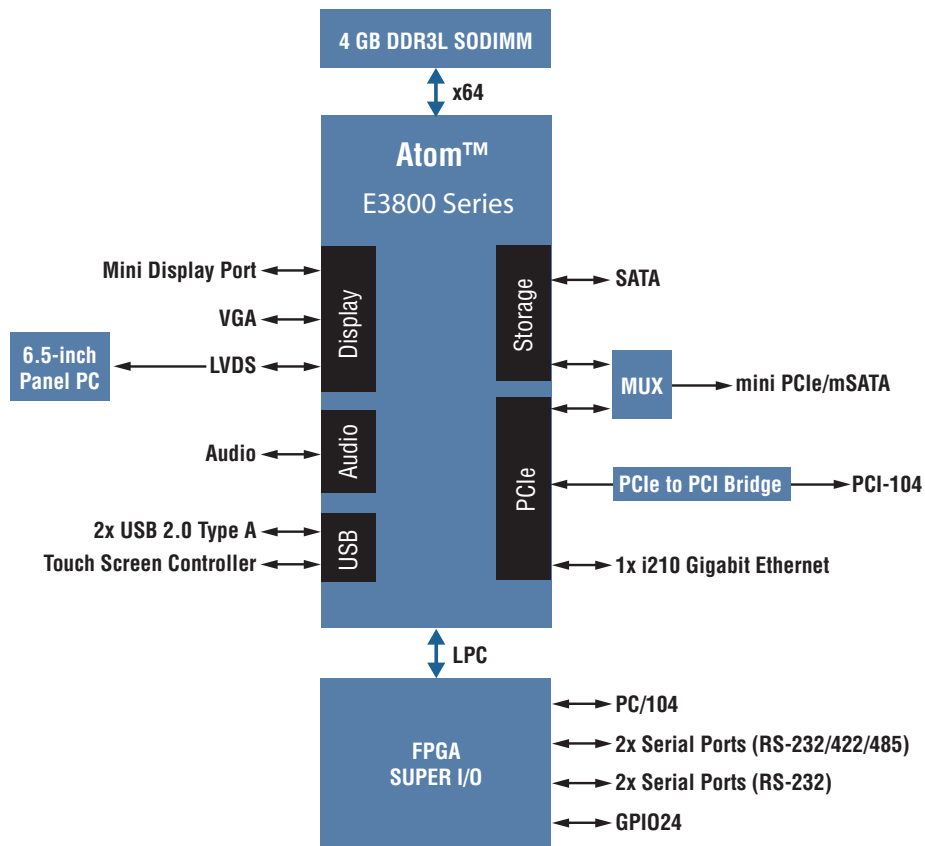

Connectors

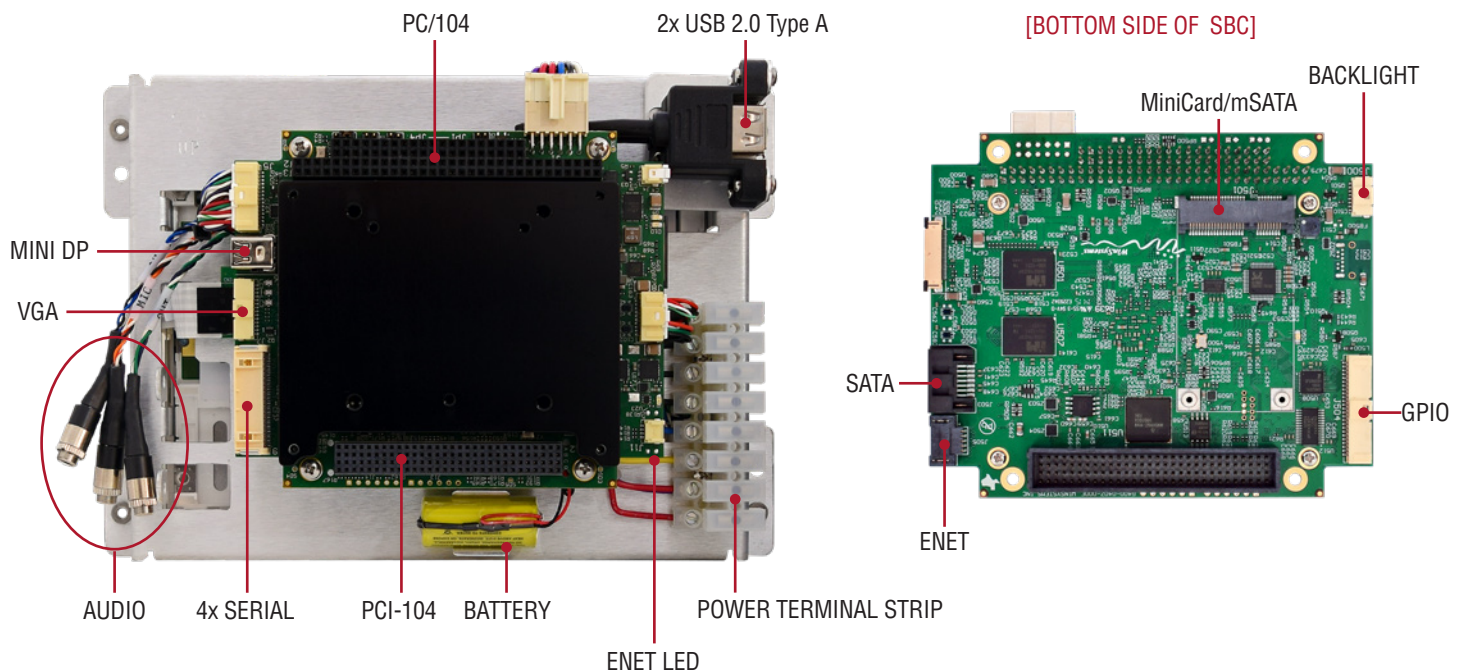

Technical Specifications

PROCESSOR	Intel® Atom™ E3815 Single-Core 1.46GHz, 512K cache (MOQ req.)	Intel® Atom™ E3825 Dual-Core 1.33GHz, 1MB cache	Intel® Atom™ E3845 Quad-Core 1.91GHz, 2 MB cache
MEMORY	<ul style="list-style-type: none"> 2GB DDR3L Soldered RAM 4GB DDR3L Soldered RAM 		
STORAGE	<ul style="list-style-type: none"> SATA 2.0 channel mSATA socket (Shared with miniPCle) 		
DISPLAY	<ul style="list-style-type: none"> Intel® Gen7 Graphics Up to Two Simultaneous Active Displays <ul style="list-style-type: none"> VGA up to 2560x1536 LVDS 18 or 24bpp DisplayPort Version 1.1 		
NETWORK INTERFACE	<ul style="list-style-type: none"> One Intel® i210 Gigabit Ethernet port with surge suppression 		
ONBOARD I/O	<ul style="list-style-type: none"> Two USB 2.0 ports with surge protection One USB 2.0 port for touch controller Two 16C550-compatible RS-232/422/485 serial channels with speeds up to 500Kbps Two 16C550-compatible RS-232 serial channels with speeds up to 250Kbps 24 lines of general purpose digital I/O (5V tolerant) Speaker output for beep tones Status LEDs for Ethernet, 3.3V Stand-By, and one software controlled Stereo audio output, mic, and line input Realtime clock with optional battery back up Watchdog timer adjustable from 1 second to 255 minutes 		
EXPANSION BUS	<ul style="list-style-type: none"> PC/104-Plus Expansion (includes PC/104 and PCI-104) MiniPCle Expansion slot (shared with mSATA) 		
POWER	<ul style="list-style-type: none"> +5V DC required (Power consumption estimates are for the PPM-C407 only and exclude any external devices) 		
SOFTWARE	<ul style="list-style-type: none"> UEFI compliant BIOS in SPI Flash Device Compatible with Linux, Windows, and other x86 operating systems 		
ENVIRONMENTAL	<ul style="list-style-type: none"> -30°C to +85°C Operational temperature RoHS-compliant 		
MECHANICAL	Dimensions - 7.75 x 5.375 x 2.25 inches (196.85 x 136.53 x 57.15 mm)		

Order Information

SBC PART NUMBER	PPC3-6.5-407-3815-R Single-Core options <i>Build-to-Order</i>	PPC3-6.5-407-3825-2 6.5-inch Panel PC with E3825, 2GB RAM, heat spreader PPC3-6.5-407-3825-4 6.5-inch Panel PC with E3825, 4GB RAM, heat spreader	PPC3-6.5-407-3845-2 6.5-inch Panel PC with E3845, 2GB RAM, heat spreader PPC3-6.5-407-3845-4 6.5-inch Panel PC with E3845, 4GB RAM, heat spreader
------------------------	---	--	--

Expansion and Customization Options

WINSYSTEMS provides additional cables, expansion cards, power supplies, and solid state drives to complete your embedded computing solution including data acquisition, communications, location, and other features via PCIe/104 and M.2 interfaces. Our Application Engineers are available to guide you through product selection and customized options.



Parhelia B.V.
www.parhelia-bv.com
 ☎ +31(0)10 741 00 28



WINSYSTEMS reserves the right to make changes to products and/or documentation without further notification. Product names of other companies may be trademarks of their respective companies.