

PPM-DC-ATX-P

PC/104-Plus ATX Model DC/DC Power Supply

Features

- Wide input range: 10V to 50VDC
- Voltage output: +5V, +3.3V, +12V, -12V, and +5VSB
- Power On/Off, Power Good, and +5 VSB supported for power management and sleep modes
- No minimum load required for regulation
- Outputs have short circuit/overload protection
- LEDs provide visual status of power
- Two Phoenix® terminal blocks for accessory power
- High efficiency design
- Fast transient response
- No fan or heatsink required
- Up to -40°C to +85°C operation supported
- Small size: 3.6 x 3.8 inches (90 x 96mm)
- Custom OEM configurations available
- RoHS compliant



Product Description


WinSystems' PPM-DC-ATX-P is a PC/104-Plus module that produces five regulated DC voltages from a common DC input. It features a very wide voltage input range from 10 to 50 volts. This allows the unit to operate with 12, 24, or 48 volt battery or distributed DC power systems.

This high-efficiency power supply design supports ATX-compatible signals so it can use power management modes. ATX mode support Power On/Off, Power Good, and +5VSB to allow software controlled shutdown and sleep modes.

Each output is short circuit protected and current limited. A minimum load is not needed to bring the supply into regulation.

When power is applied to the board, five LEDs will illuminate providing a visual status that power is available for the +5V, +3.3V, ± 12 V, and +5V standby. If one of these LEDs is not lit or is pulsing ON and OFF, then the respective supply voltage is not in regulation. A pulsating LED is an indication that the respective converter is in current limit.

There is also a connector for an ON/OFF switch for remote shutdown of the system. However, the +5VSB source will continue to be active.

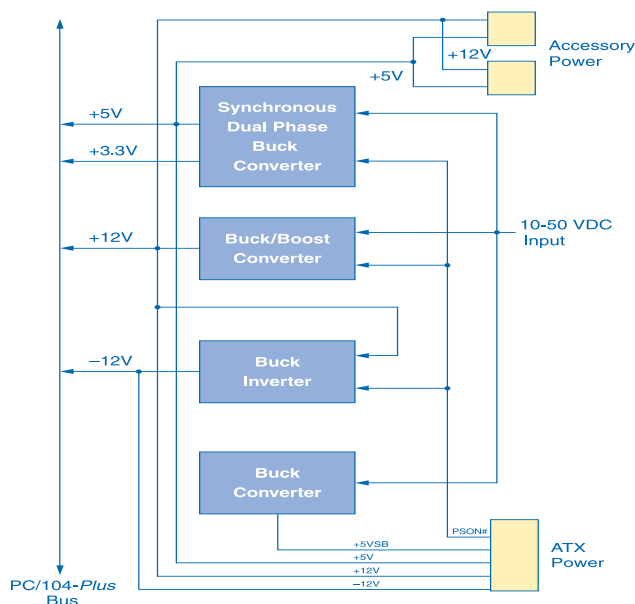

PPM-DC-ATX-P Block Diagram



Parhelia B.V.
www.parhelia-bv.com
+31(0)10 741 00 28

PPM-DC-ATX-P: ATX Model DC/DC PC/104-Plus Power Supply

The board is populated with low-profile, soldered down, surface mount components which keep the overall height of the board low.

The PPM-DC-ATX-P is designed to operate at extended temperatures without forced air cooling or heatsink. This maximizes reliability and reduces weight for the module and the system it powers.

Input Connector - A Phoenix Combicon connector allows for power to be easily and securely brought to the board with a quick way to remove it if necessary. The mating connector is shipped with each standard board.

PC/104-Plus Connectors - The ground, power and control signals are wired directly to their respective pins on the PC/104 and PCI-104 connectors.

Accessory Power - There are two, four-pin Phoenix Contact terminal blocks at the edge of the board to provide +5V and +12V to accessories.

There is also a microATX connector on the board that allows access to the +5V, +3.3V, +12V, -12V, and +5VSB DC voltages. The Power On/Off and Power Good control signals are also available at this connector.

Fanless - No fans or heatsinks are required to meet the extended operating temperature range of -40° to +85°C.


Other Standard Configurations - WinSystems offers other non-ATX versions. All boards can operate over the temperature range of -40°C to +85°C without a fan or heatsink.

ISM-DC-AT512-P is a stand alone DC/DC power supply with +5V and +12V. The PCM-DC-AT500 card is a single +5V PC/104 power supply. The PCM-DC-AT512-P adds a +12V, a -12V converter, and includes accessory power terminals.

Please reference the specific data sheets for details on the other DC/DC power supplies.

Custom Configurations - WinSystems offers additional ruggedized options and custom configurations for OEMs. Please contact an Applications Engineer to discuss your specific requirements.

WinSystems reserves the right to make changes to products and/or documentation without further notification. Product names of other companies may be trademarks of their respective companies.

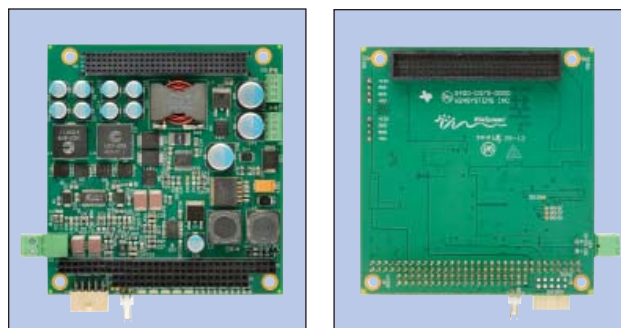

Front and Back Picture of PPM-DC-ATX-P

Technical Specifications

Electrical

Input

Voltage (V_{IN}) 10 to 50VDC

Output

Voltage/current
(at $V_{IN} = +12V$) +5V @ 10A
+3.3V @ 10A
+12V @ 3A
-12V @ 800mA
+5VSB @ 2A
Load regulation 30 mV
Line regulation 20 mV
Ripple <150 mV

Environmental

Operational from -40° to +85°C
RoHS compliant

Mechanical

Dimensions 3.6 x 3.8 inches (90 x 96mm)
PC Board 0.078 inches, four layer FR4
PC/104-Plus 120-pin (4 x 30; 2mm) stackthrough
PC/104 16-bit stackthrough
Weight 4.5 oz. (127 gm)

Ordering Information

Visit www.WinSystems.com for complete ordering details.

PPM-DC-ATX-P	PC/104-Plus ATX power supply
ISM-DC-AT512-P	Dual output +5V and +12V DC/DC power supply
PCM-DC-AT500	Single +5V output, PC/104 DC/DC power supply
PCM-DC-AT512-P	Triple output +5V and $\pm 12V$ PC/104 DC/DC power supply



Parhelio B.V.
www.parhelio-bv.com
☎+31(0)10 741 00 28

